


BRF-350-542

Band reject filter 350 – 542 MHz



57150815
BRF-350-542

Parameter	Frequency [MHz]	BRF-350-542
Housing		Copper Tube
Connector		Male & Female F-type
Connector Screw Thread [inch]		W 3/8" -32UNEF
Dimensions [mm]		21(Ø) x 57(L)
Net Weight [g]		48
Frequency Range [MHz]		5 – 1.218
Impedance [Ω]		75
Pass Bands [MHz]		5 – 326 & 566 – 1.218
Insertion Loss typ/max [dB]	5 – 326	1,8/2,0
	566 – 1.218	2,8/3,0
Return Loss min/typ [dB]	5 – 326	16/18
	566 – 750	14/16
	751 – 1.218	12/14
Stop Band [MHz]		350 – 542
Rejection min/typ [dB]	350 – 532	45/50
	542	30/40
Screening efficiency		EN 50083-2 Class A + 10 dB
Order No.		57150815

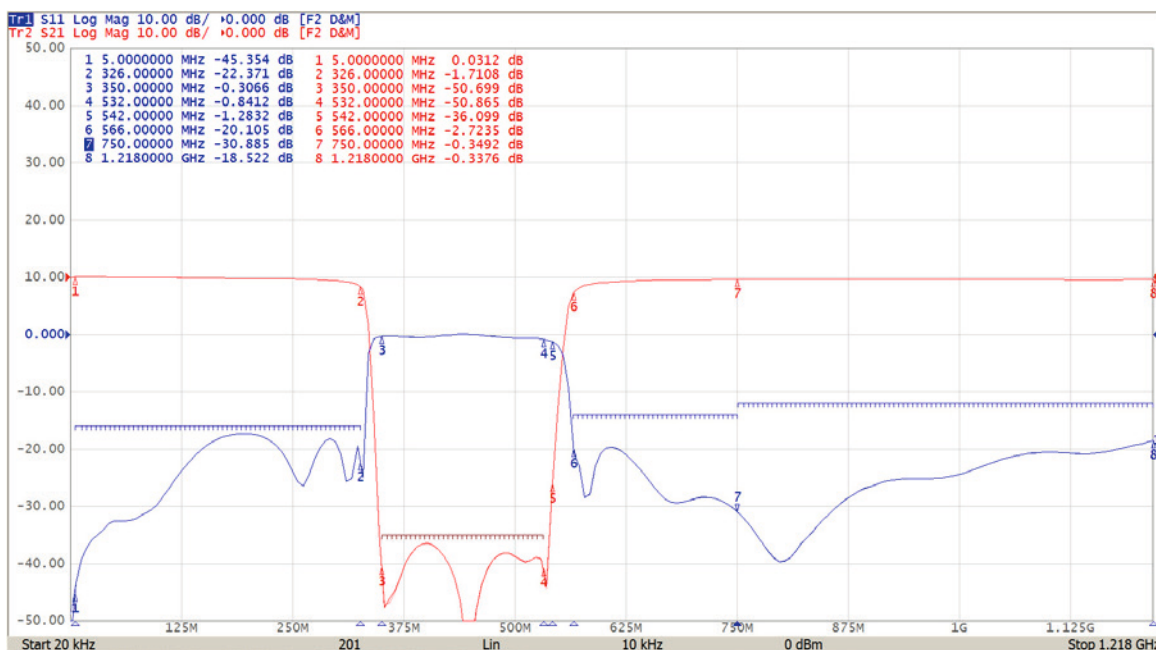

Insertion Loss,
Rejection and
Return Loss
Span: 1.218 MHz