

# Crimp connectors

**54246100**  
F-59-ALM 3,7/6,4



**54248500**  
F-56-ALM 5,1/8,4



**54253000**  
F-56-ALM 4,9/8,4



**54249000**  
FM-RG11-  
ALM 7,6/11,7



- All connector F-nuts are HEX 11
- Designed for very high strain relief
- Optimal fitting to the corresponding cable type
- High unalloyed brass as base material, NITIN surface




Parameter	F-59-ALM 3,7/6,4	F-56-ALM 5,1/8,4	F-56-ALM 4,9/8,4	FM-RG11-ALM 7,6/11,7
For cable type	Belden H-121-T-00, H-121-B	Belden H-125-CH and Ören HD-113	Belden H-126-T-00 and Ören HD-103	PRG 11 Cu, PRG 11 DB+ and Ören HD-163
Length [mm]	20,5	20,5	20,5	35,2
Frequency range [MHz]	5 – 2.500			
Screening factor [dB]	> 90			
Impedance [Ω]	75			
Operating temperature range [°C]	-37 ... +70			
Return loss [dB]	> 30			
Order No.	54246100	54248500	54253000	54249000

Crimp the following connectors here:

- F-59-ALM 3,7/6,4
- F-56-ALM 5,1/8,4
- F-56-ALM 4,9/8,4

Crimp the following connector here:

- FM-RG11-ALM 7,6/11,7

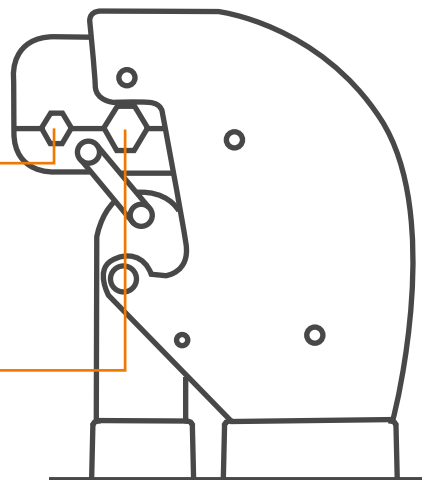

CRP 106F - .324" + .475"

Please use only the recommended crimp tool  
with Order No. 55230000!

Please find further information within our tools catalogue.