


WAVEPACE® Pull-out panel

Patch and splice-patch panel for up to 48 port LC/APC




10443957
SP-48-Pull-Panel-LC/APC

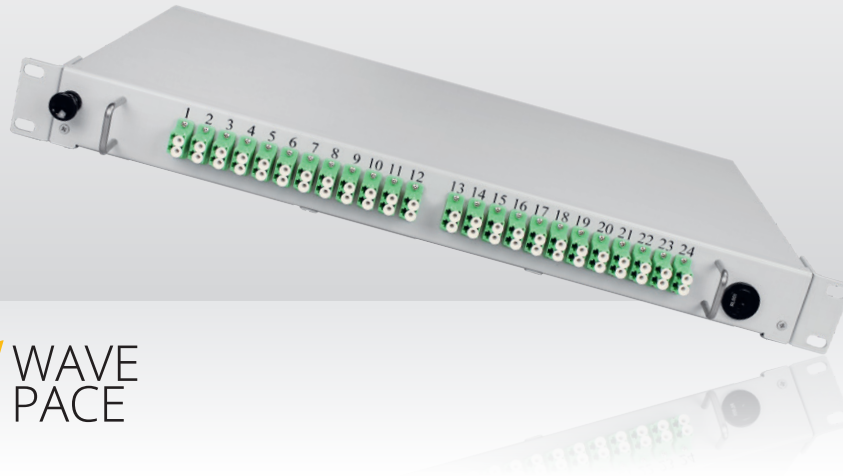

- 1 RU pull-out panel for splicing and patching with 19" mounting option
- Robust metal construction with pull-out tray
- Mounting bracket adjustable in depth
- Pre-installed with 24 LC/APC duplex adapters
- Option to include up to 4 splice trays
- Includes separate horizontal cable routing bracket for appropriate installation on the front without disturbing the systems underneath
- Rear cable entry, offset by 30 mm in depth for PG gland and angled feed with hammer head support using cable ties
- Additional support options on the back to secure cables/wires using cable ties
- Installation material and accessories are included in the scope of delivery
- Customer-specific configurations are possible on request

Parameter	SP-48-Pull-Panel-LC/APC	SP-48-Pull-Panel-LC/APC-24-Crimp	SP-48-Pull-Panel-LC/APC-48-Crimp
Application	Splice/patch		
Interface	24 LC/APC duplex adapters pre-installed, bolt for 4 splice cassettes	Ready-to-splice pre-installed with 24 LC/APC duplex adapters and 24 pigtailed according DIN color code, stored in 2 splice trays with crimp splice protection	Ready-to-splice pre-installed with 24 LC/APC duplex adapters and 48 pigtailed according DIN color code, stored in 4 splice trays with crimp splice protection
Capacity	48 port LC/APC, 48 splices		
Material	Metal, powder-coated		
Cable feed	Rear cable entry (left/right offset) for PG 16 and PG 13,5 (each included once in scope of supply), PG gland and angled cable feed with hammer head support for cable ties		
Connector quality	-	Grade B	
Fiber type	-	G.657.A1	
Dimensions (L x W x H) [mm]	465 x 240 x 44,45 (1 RU), separate horizontal cable routing bracket: D = 50 mm		
Special features	Key-lock system at right hand side, separate horizontal cable routing bracket		
Color	Light grey, RAL 7035		
Order No.	10443957	10443964	10443965

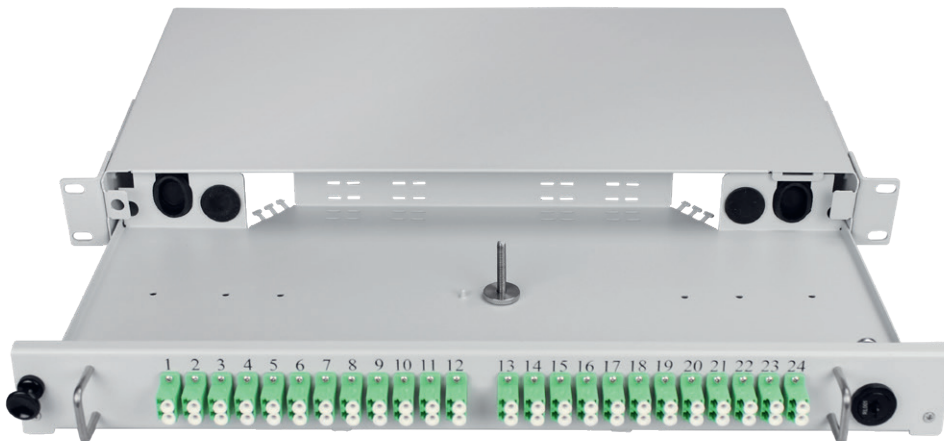

SP-48-Pull-Panel-LC/APC
Fully extended