


# Indoor speedpipes

with fitting accessories



**42510104**  
Indoor speedpipe

**42512317**  
Indoor sealing  
element

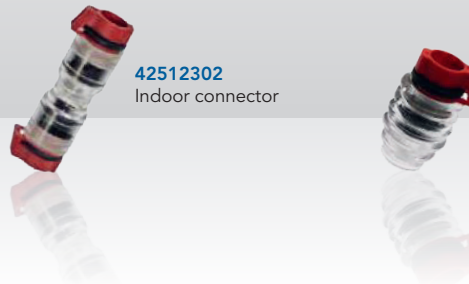

**42512302**  
Indoor connector

**42512311**  
Indoor end cap

## Indoor speedpipes

- For blowing in fibers, especially suitable for interior use
- Material: PD-HD acc. to DIN 16874
- Translucent base material for occupancy detection
- White color for restrained indoor hauling
- Optimized trapezoidal internal groove for optimal blowing results
- Low smoke acc. to DIN EN 61034-2, flame-retardant acc. to DIN EN 61386-1 and halogen-free acc. to DIN V VDE V 0604-2-100 (LSOH) for highest security in case of fire
- VDE-tested and certified acc. to DIN EN 61386-22(VDE0605) for defining the installation

Diameter [mm]	Packaging unit [m]	Order No.
7 x 1,5	1.250	<b>42510102</b>
10 x 2,0	2.500	<b>42510104</b>

## Indoor connectors

- For pressure-tight connection of indoor speedpipes with identical diameter, high tensile strength
- Pre-assembled locking clips prevent unwanted release
- Metal-free and transparent base body, clamping teeth made of stainless steel
- Suitable for blowing pressures up to 15 bar
- Flame retardant acc. to DIN EN 61386-22 and UL94-V2
- Not suited for direct burial

Diameter [mm]	Packaging unit [pcs]	Note	Order No.
5	10	e.g. Hydra cable	<b>43022707</b>
5	10	with GAS-Stop, e.g. Hydra cable	<b>43022708</b>
7	100		<b>42512301</b>
10	50		<b>42512302</b>

## Indoor end caps

- For permanent and pressure-tight closure of unoccupied indoor speedpipes with high tensile strength
- Pre-assembled locking clips prevent unwanted release
- Metal-free and transparent base body, clamping teeth made of stainless steel
- Suitable for blowing pressures up to 15 bar
- Flame retardant acc. to DIN EN 61386-22 and UL94-V2
- Not suited for direct burial

Diameter [mm]	Packaging unit [pcs]	Note	Order No.
5	250	e.g. Hydra cable	<b>43022705</b>
5	10	with GAS-Stop, e.g. Hydra cable	<b>43022706</b>
7	100		<b>42512309</b>
10	50		<b>42512311</b>

## Indoor sealing elements

- Splittable and reusable elements for sealing unoccupied as well as occupied indoor speedpipes
- Water and gas tightness up to 0,5 bar
- Flame retardant acc. to DIN EN 61386-22
- Labeling field included (33 x 14 mm)
- White color for restrained indoor hauling

Diameter [mm]	Cable diameter [mm]	Packaging unit [pcs]	Order No.
7	0,8 – 2,5	<b>25</b>	<b>42512315</b>
7	2,0 – 4,0	<b>25</b>	<b>42512316</b>
10	1,8 – 3,5	<b>25</b>	<b>42512317</b>
10	3,0 – 5,0	<b>25</b>	<b>42512318</b>
10	4,5 – 6,0	<b>25</b>	<b>42512319</b>