

# Professional crimp connectors for drop and distribution cables

**54246100**  
F-59-ALM 3,7/6,4



**54251100**  
F-59-ALM 3,9/7,6



**54248500**  
F-56-ALM 5,1/8,4



**54253000**  
F-56-ALM 4,9/8,4



**54249000**  
FM-RG11-  
ALM 7,6/11,7



- All connector F-nuts are HEX 11
- Designed for very high strain relief
- Optimal fitting to the corresponding cable type
- High unalloyed brass as base material, NITIN surface




Parameter	F-59-ALM 3,7/6,4	F-59-ALM 3,9/7,6	F-56-ALM 5,1/8,4	F-56-ALM 4,9/8,4	FM-RG11-ALM 7,6/11,7
For cable type	H121T00, H 121 B	RG 59-types, Ören HD-083	H 125 CH, BKS 2050/30 and Ören HD-113	BTC 1000/20 Cu, H126T00 and Ören HD-103	PRG 11 Cu, PRG 11 DB+ and Ören HD-163
Length [mm]	20,5	20,5	20,5	20,5	35,2
Frequency range [MHz]	5 – 2.500				
Screening factor [dB]	> 90				
Impedance [Ω]	75				
Operating temperature range [°C]	-37 ... +70				
Return loss [dB]	> 30				
Order No.	54246100	54251100	54248500	54253000	54249000

**Crimp your connectors here for:**

- H 121,
- H 121B,
- MKL 0,8/3,5,
- BTC 1000/26,
- H125 CH,
- BKS 2050/30,
- BTC 1000/20 Cu,
- WKL 1,0/4,6 und
- WKL 1,0/4,8 CH.

**Crimp your connectors here for:**

- PRG 11 Cu,
- PRG 11 DB+ and
- KKL 1,6/7,2.

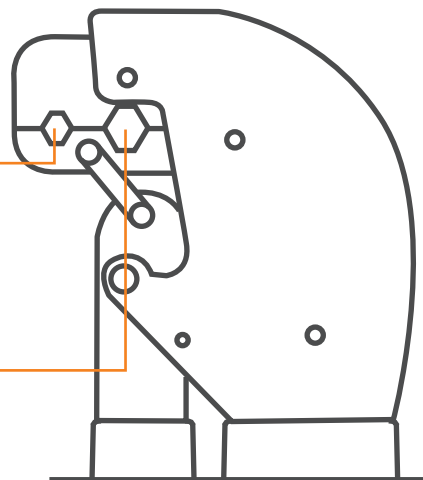

CRP 106F - .324" + .475"

**Please use only the recommended crimp tool with Order No. 55230000!**

Please find further information within our tools catalogue.