


Splice panels




10443957
SP-48-Pull-Panel-LC/APC

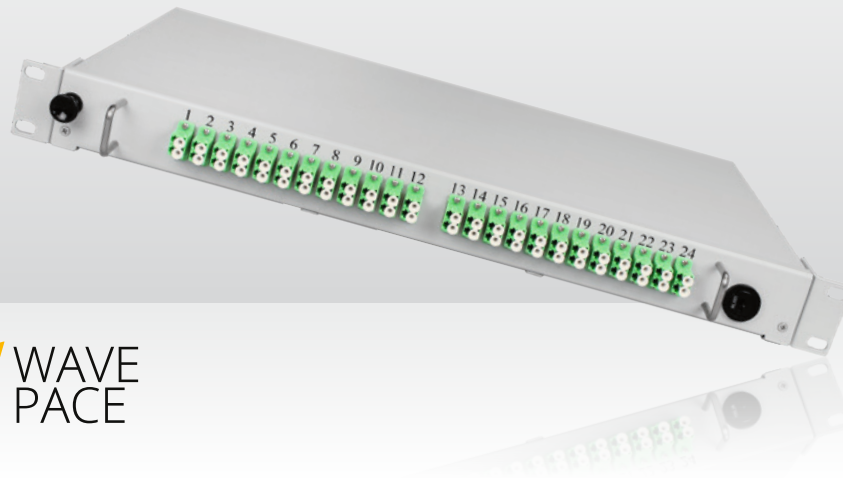

- 1 RU pull-out panel for splicing and patching with 19" mounting option
- Robust metal construction with pull-out tray
- Mounting bracket adjustable in depth
- Pre-installed with 24 LC/APC duplex adapters
- Option to include up to 4 splice trays
- Includes separate horizontal cable routing bracket for appropriate installation on the front without disturbing the systems underneath
- Rear cable entry, offset by 30 mm in depth for PG gland and angled feed with hammer head support using cable ties
- Additional support options on the back to secure cables/wires using cable ties
- Installation material and accessories are included in the scope of delivery
- Customer-specific configurations are possible on request

Parameter	SP-48-Pull-Panel-LC/APC	SP-48-Pull-Panel-LC/APC-24-Crimp	SP-48-Pull-Panel-LC/APC-48-Crimp
Application	Splice/patch		
Interface	24 LC/APC duplex adapters pre-installed, bolt for 4 splice cassettes	Ready-to-splice pre-installed with 24 LC/APC duplex adapters and 24 pigtailed according DIN color code, stored in 2 splice trays with crimp splice protection	Ready-to-splice pre-installed with 24 LC/APC duplex adapters and 48 pigtailed according DIN color code, stored in 4 splice trays with crimp splice protection
Capacity	48 port LC/APC, 48 splices		
Material	Metal, powder-coated		
Cable feed	Rear cable entry (left/right offset) for PG 16 and PG 13,5 (each included once in scope of supply), PG gland and angled cable feed with hammer head support for cable ties		
Connector quality	Grade B		
Fiber type	G.657.A1		
Dimensions (L x W x H) [mm]	465 x 240 x 44,45 (1 RU), separate horizontal cable routing bracket: D = 50 mm		
Special features	Key-lock system at right hand side, separate horizontal cable routing bracket		
Color	Light grey, RAL 7035		
Order No.	10443957	10443964	10443965

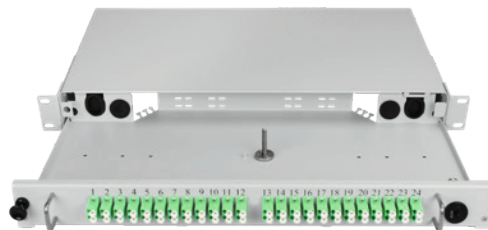

Further splice panels, pre-assembled with splice trays and pigtailed

Parameter	OSP-19-12-SC/APC	OSP-19-24-SC/APC	OSP-19-48-SC/APC	OSP-19-48-SC/APC-2U	OSP-19-72-SC/APC-2U	OSP-19-12-LC/APC	OSP-19-24-LC/APC	OSP-19-48-LC/APC-2U	OSP-19-72-LC/APC-2U
Application	Use in standard 19" racks								
Amount splice cassettes	1	2	4	4	6	1	2	4	6
Amount adapters	12	24	24	48	72	6	12	24	36
Connector type	SC/APC Simplex	SC/APC Simplex	SC/APC Duplex	SC/APC Simplex	SC/APC Simplex	LC/APC Duplex	LC/APC Duplex	LC/APC Duplex	LC/APC Duplex
Amount pigtailed	12	24	48	48	72	12	24	48	72
Dimensions	1 HE	1 HE	1 HE	2 HE	2 HE	1 HE	1 HE	2 HE	2 HE
Material	1,6 mm RAL 7035 light grey								
Order No.	10443950	10443951	10443949	10443952	10443953	10443910	10443911	10443921	10443920

Further splicepanel models are available on request (e.g. FC and E2000)!